

HCC3120B-IR

2Megapixel 1080P Water-proof HDCVI IR-Bullet Camera



Features

- 1/2.7" 2Megapixel CMOS
- 25/30fps@ 1080P
- High speed, long distance real-time transmission
- Day/Night(ICR), AWB, AGC, BLC, 2DNR
- 3.6mm fixed lens (6mm, 8mm optional)
- Max. IR LEDs length 50m, Smart IR
- IP67, DC12V


HCC3120B-IR

Technical Specifications

| | |
|------------------------|--|
| Model | HCC3120B-IR |
| Camera | |
| Image Sensor | 1/2.7" 2Megapixel CMOS |
| Effective Pixels | 1930(H)×1088(V) |
| Electronic Shutter | 1/60s~1/100,000s |
| Video Frame Rate | 30fps@1080P |
| Synchronization | Internal |
| Min. Illumination | 0.02Lux/F2.0, 0Lux IR on |
| Video Output | 1-channel BNC HDCVI high definition video output |
| Camera Features | |
| Max. IR LEDs Length | 50m, Smart IR |
| Day/Night | Auto(ICR) / Color / B/W |
| Noise Reduction | 2D |
| Lens | |
| Focal length | 3.6mm (6mm, 8mm optional) |
| Angle of View | H: 89.9 ° 59.4 ° 41.4 ° |
| Mount Type | M12 |
| General | |
| Power Supply | DC12V±20% |
| Power Consumption | Max 4.5W |
| Working Environment | -30°C~+60°C / Less than 95%RH (no condensation) |
| Transmission Distance | Over 500m via 75-3 coaxial cable |
| Ingress Protection | IP67 |
| Dimensions(W×D×H) | 241.8mm×90.2mm×83.7mm |
| Weight | 0.635kg |
| Material | Metal |

HCC3120B-IR

Dimensions (mm)

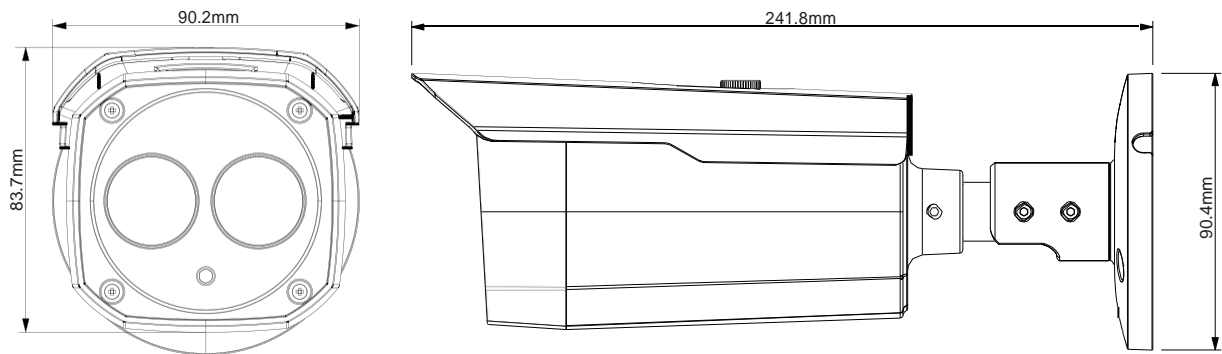

Accessories (optional)

